




Montanari Group

GEARLESS&GEARBOX
TRACTION MACHINES

ARGANO
GEARBOX
TREUIL
GETRIEBE
REDUCTOR

RANGE
M75

TOP
SELLER
630 kg
1 m/s
T.S. 480 mm

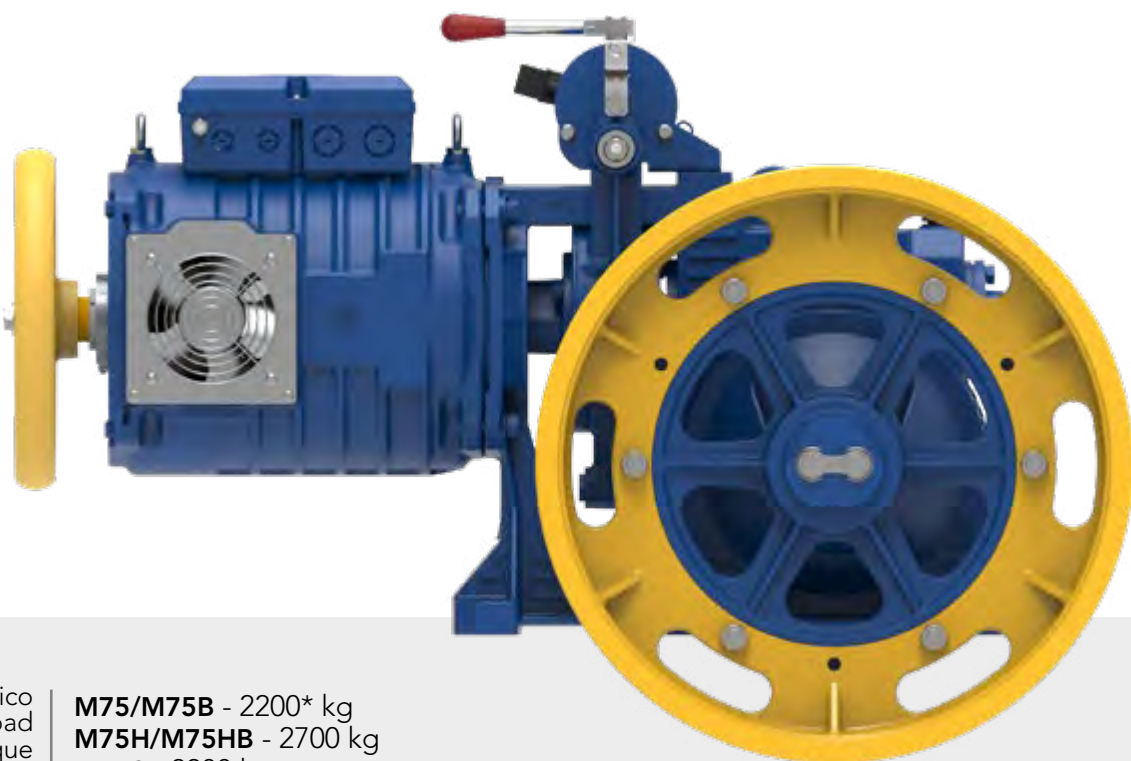

Carico Statico
Static Load
Charge Statique
Statische Belastung
Carga Estática

M75/M75B - 2200* kg
M75H/M75HB - 2700 kg
M75S - 3200 kg
M75AL - 2500 kg

Motori
Motor
Moteurs
Motoren
Motores

VWF 4 - 6 P
AC2 4/16 - 6/24 P

Peso Riduttore
Reductor Weight
Poids Reducteur
Getriebe Gewicht
Peso Reductor

M75/M75H - 115 kg
M75S - 120 kg
M73AL - 150 kg

Capacità Olio
Oil Capacity
Capacité Huile
Ölmenge
Capacidad Aceite

2.8 l - Sint.

*Per tiro verso il basso - For downward roping - Mouflage vers le bas - Nach unten Zug - Tiro hacia abajo

Rapporti Ratio Rapport Übersetzung Reducción	Momento torcente Torque Moment Moment de Torsion Torsionsmoment Par de Torsion	Rendimento Efficiency Rendement Wirkungsgrad Rendimiento	
	Nm	1500/1800 RPM	1000/1200 RPM
1/52	1081	0.73	0.70
1/50	1120	0.72	0.69
1/37	1181	0.84	0.83
2/55	1050	0.84	0.83
2/37	622	0.86	0.81

Telaio & Protezioni
Bedplate & Safety guards
Chassis & Protections
Maschinenrahmen & Seilschutzbügel
Bancada & Protecciones

#102
103


Gestisci il tuo argano con:
Manage your gearbox with:
Gérez votre treuil avec :
Verwalten Sie Ihre Getriebe mit:
Gestiona tu reductor con:

montanariapp


MORE ON
OUR WEBSITE



M75
M75H

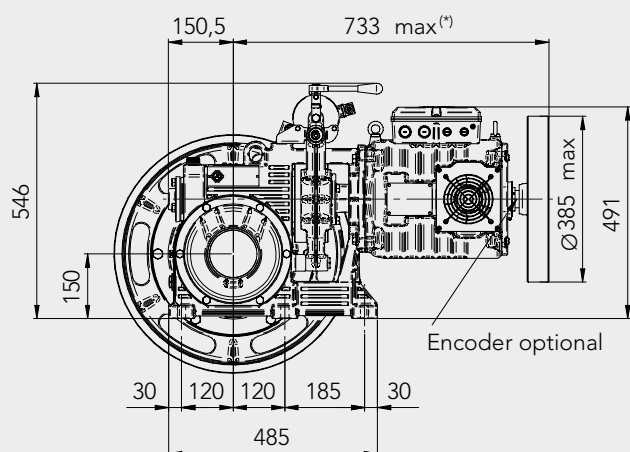


DP	B	A
mm	mm	mm
≤600	115	105
650	78	117
700	87	120


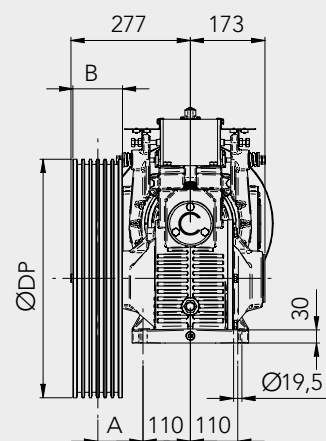


(*)= according to motor size


M75AL

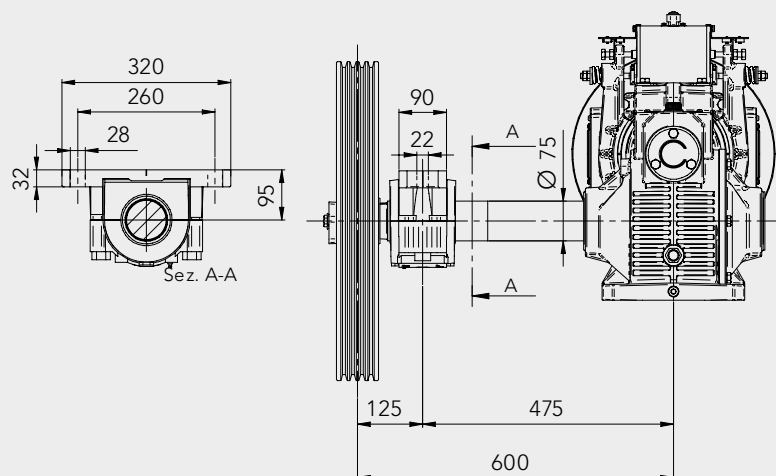

M75S

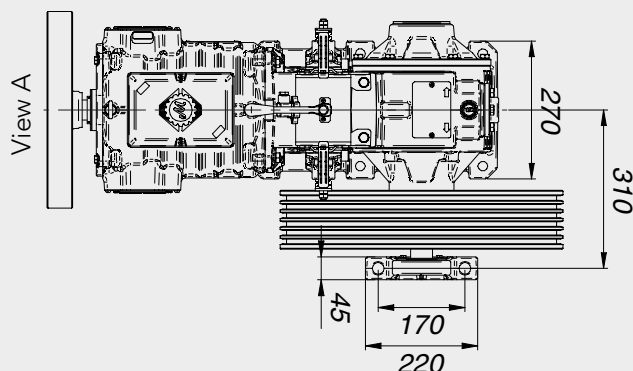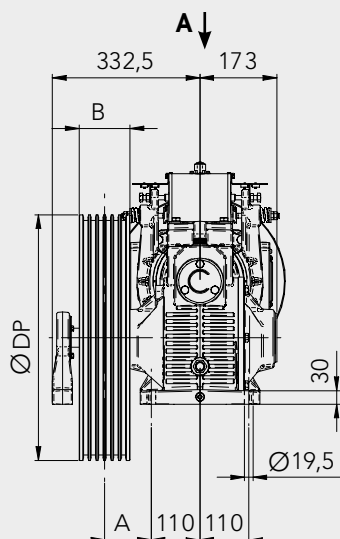

M75B
M75HB

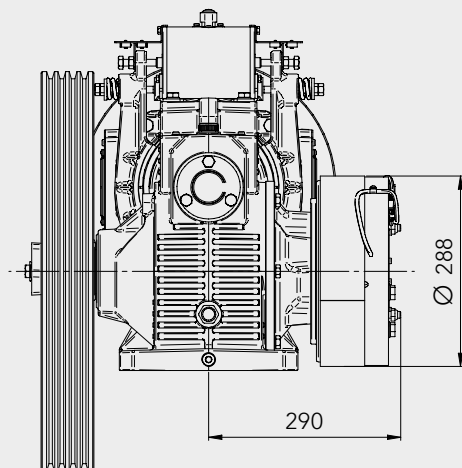

Momento Torcente Torque Moment Moment de Torsion Torsionsmoment Par de torsión	Voltaggio Voltage Tension Spannung Voltaje	Potenza Power Puissance Leistungen Potencia
Nm	V DC	W
1000	207/104	302/76
Conforme a / Complies with / Conforme à / Entspricht / Conforme con: EN 81-20 ed EN 81-50		

